



Calhoun: The NPS Institutional Archive
DSpace Repository

Faculty and Researchers

Faculty and Researchers' Publications

2018-04

Networked Undersea Autonomous Sensing and Tracking

Smith, Kevin B.

Monterey, California. Naval Postgraduate School

<http://hdl.handle.net/10945/60552>

This publication is a work of the U.S. Government as defined in Title 17, United States Code, Section 101. Copyright protection is not available for this work in the United States.

Downloaded from NPS Archive: Calhoun



<http://www.nps.edu/library>

Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

Objectives

- Evaluate capabilities of acoustic vector sensors integrated into distributed platforms in providing bearing estimations for target motion analysis;
- Examine pros and cons of submerged platforms (UUVs) versus buoy systems;
- Evaluate options for acoustic signal processing;
- Evaluate trade-offs between system requirements, specifically power budget, data exfiltration options, and near-real-time reporting capabilities.

Findings and Conclusions

- Single vector sensors can effectively detect and provide good estimates of target bearing with an SNR of slightly less than 0 dB, providing useful TMA results;
- Both acoustic intensity processing as well as coherent processing produce similar results when only a single sensor is utilized;
- While UUVs provide depth excursions for sensors, they are significantly limited in mission time due to power constraints, and data exfiltration challenges;



Drifting buoy systems (left) and tethered vector sensor suspended in mount (right) being prepared for deployment in Dabob Bay, Sept 2017.


Future Work

- Evaluate capabilities of such systems for real-time RF transmission of contact/bearing reports to command center for TMA;
- Investigate additional gains achievable by adding additional sensors to each buoy system;
- Investigate potential gains by streaming raw acoustic data over RF to command center for coherent processing between separate buoy systems.


Methodology

- Integrate acoustic vector sensors into multiple distributed platforms, noting DAQ requirements, power limits, weight limits;
- Collect data simultaneously from separate systems during sea trials, first in Monterey Bay and then in Dabob Bay for analysis;
- Utilizing known targets of opportunity, evaluate performance of acoustic vector sensors in estimating target bearing based on various signal processing techniques;
- Perform basic TMA processing to assess the ability of such data to produce accurate tracking data.

- Sensors tethered to gateway buoys provide advantages through improved tracking, improved data exfiltration, and the potential for coherent/semi-coherent processing between distributed systems.

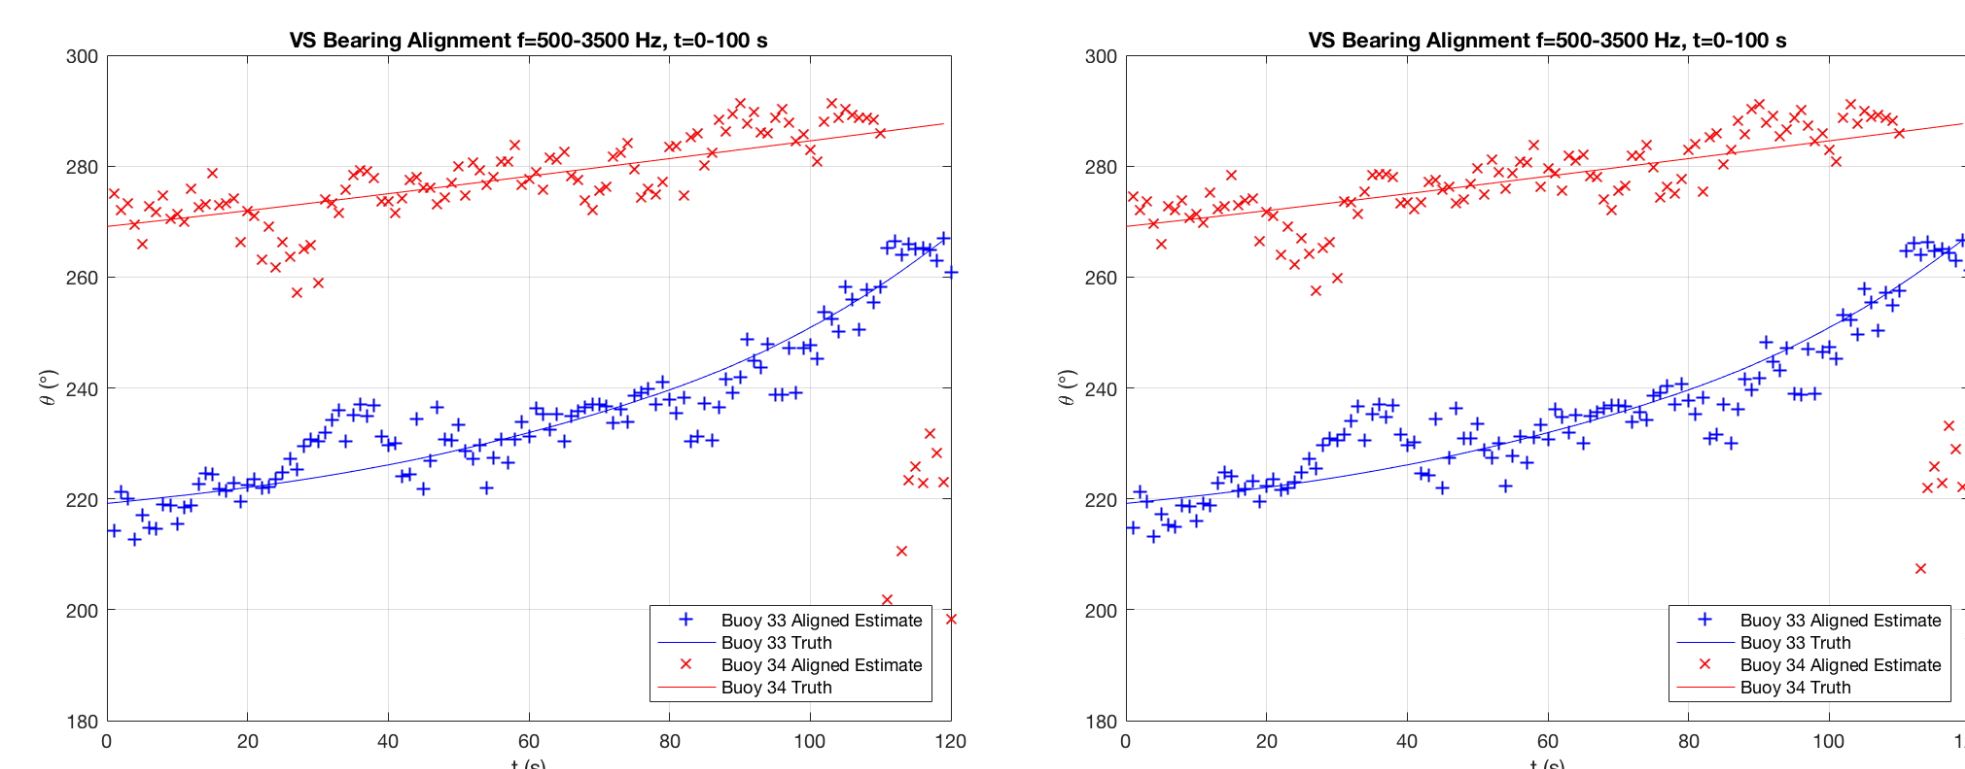

Comparison of bearing estimates from two separate buoys (red and blue data points) relative to true (red and blue lines) from both acoustic intensity processing (left) and coherent linear processing (right).

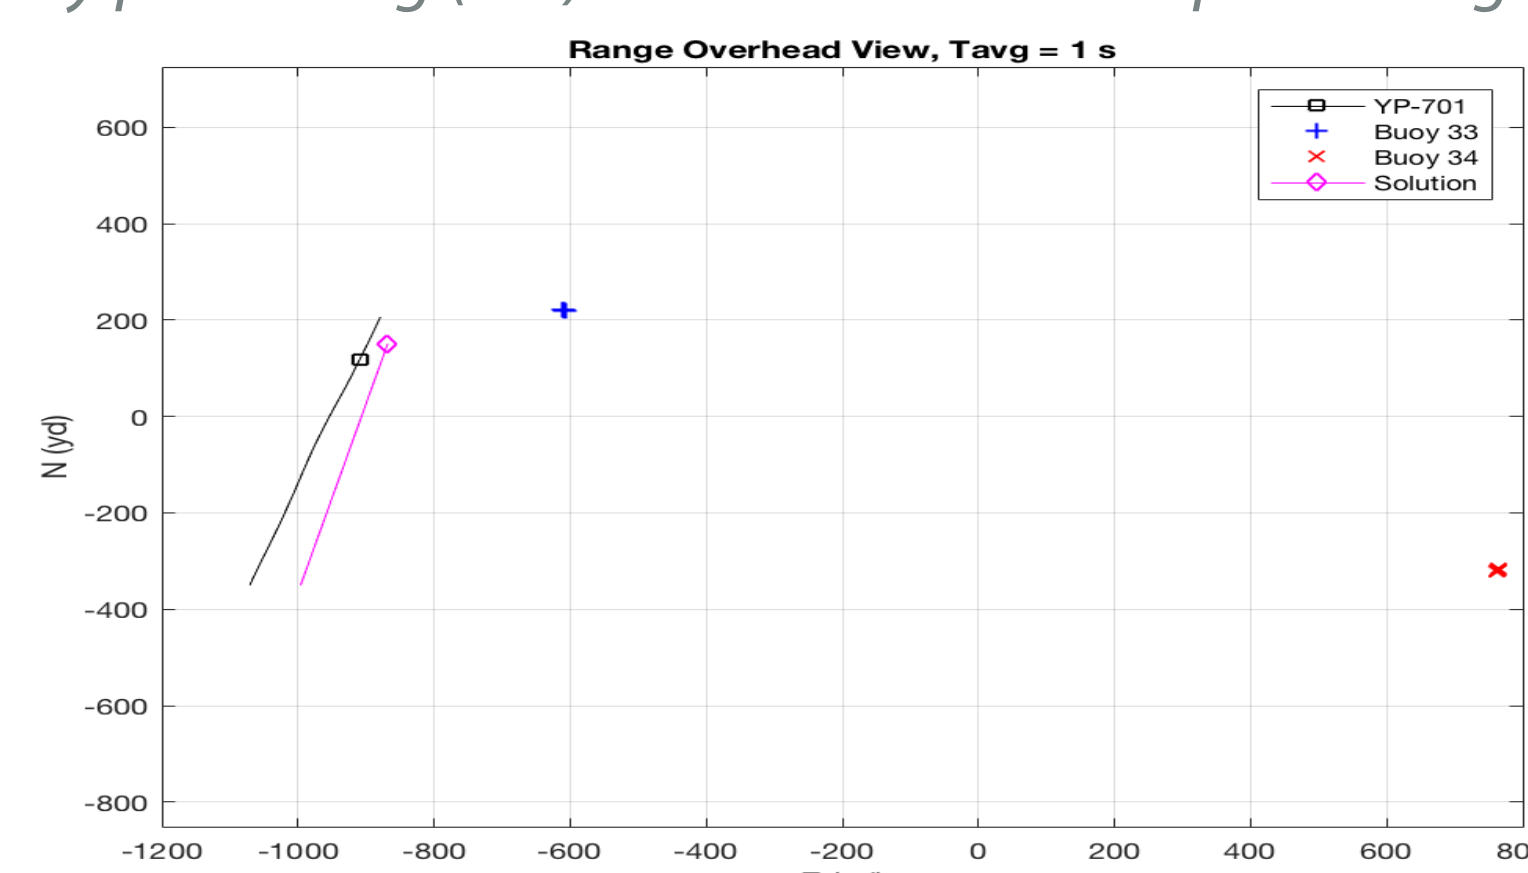

Final TMA solution (pink line) compared with true target trajectory (black line) based on bearing estimates from two separate buoys (red and blue crosses)